

# All in One Power Hub

## 12V 2000W



## Specification

\* Labels and some designs may vary depending on the manufacturing period.



|                                      |                                |
|--------------------------------------|--------------------------------|
| Model                                | All in One Power Hub 12V 2000W |
| AC Output Power(Peak)                | 2000W (4000W)                  |
| AC Output Current                    | 16.7A(120VAC) / 8.7A(230VAC)   |
| AC Output Voltage / Frequency        | 120VAC/60Hz / 230VAC/50Hz      |
| Nominal DC Input Voltage             | 12.5VDC                        |
| DC Input Voltage Operating Range     | 10.5~16.5VDC                   |
| Battery Charging Voltage Range       | 13.8~14.8VDC(Selectable)       |
| Battery Recharge Voltage Range       | 12.0~13.6VDC(Selectable)       |
| Efficiency                           | 87%                            |
| DC-DC Stater Battery Voltage Range   | 10.5~15.5V                     |
| DC-DC Charging Current Range         | 10~50A                         |
| DC-DC Reverse Charging Current Range | 10~30A                         |
| DC-DC Charging Voltage Range         | 13.8~14.8V(Selectable)         |
| Operating Temperature                | 0°C~50°C                       |
| Storage Temperature                  | -20°C~60°C                     |

# All in One Power Hub

## 12V 2000W



### Dimension

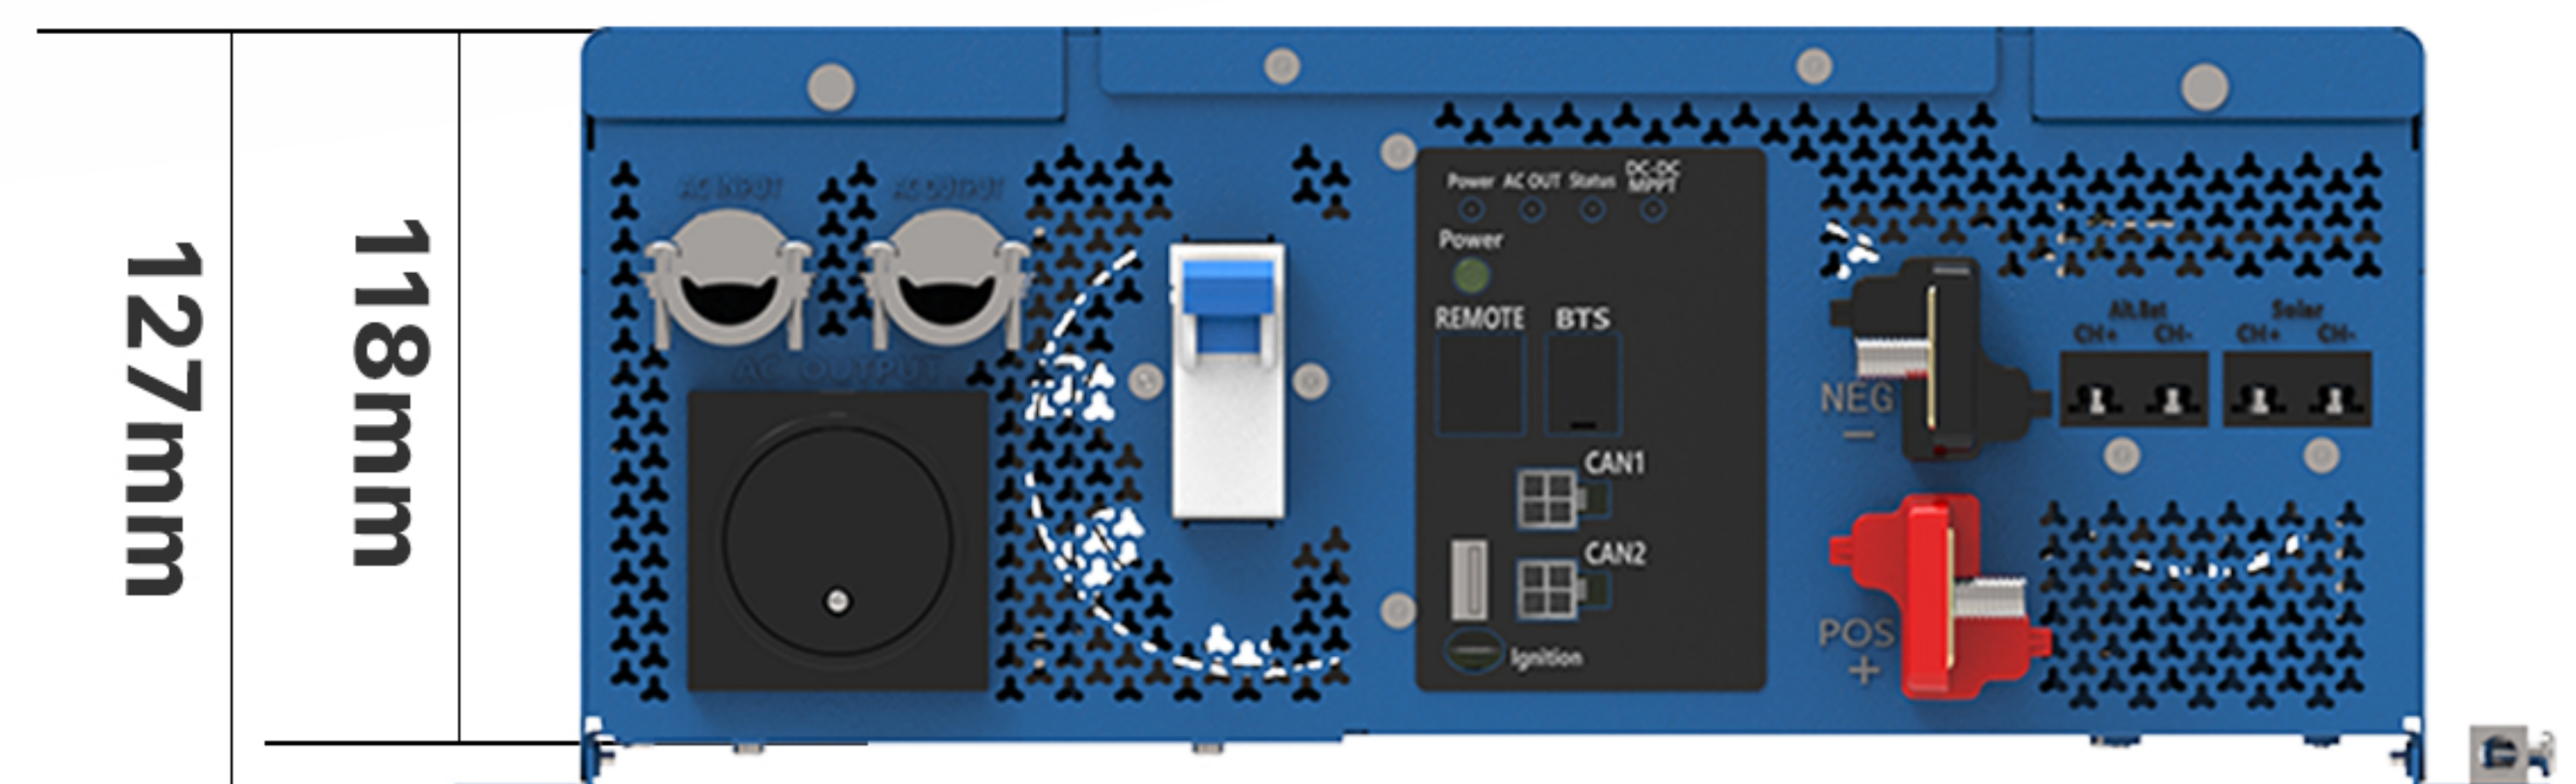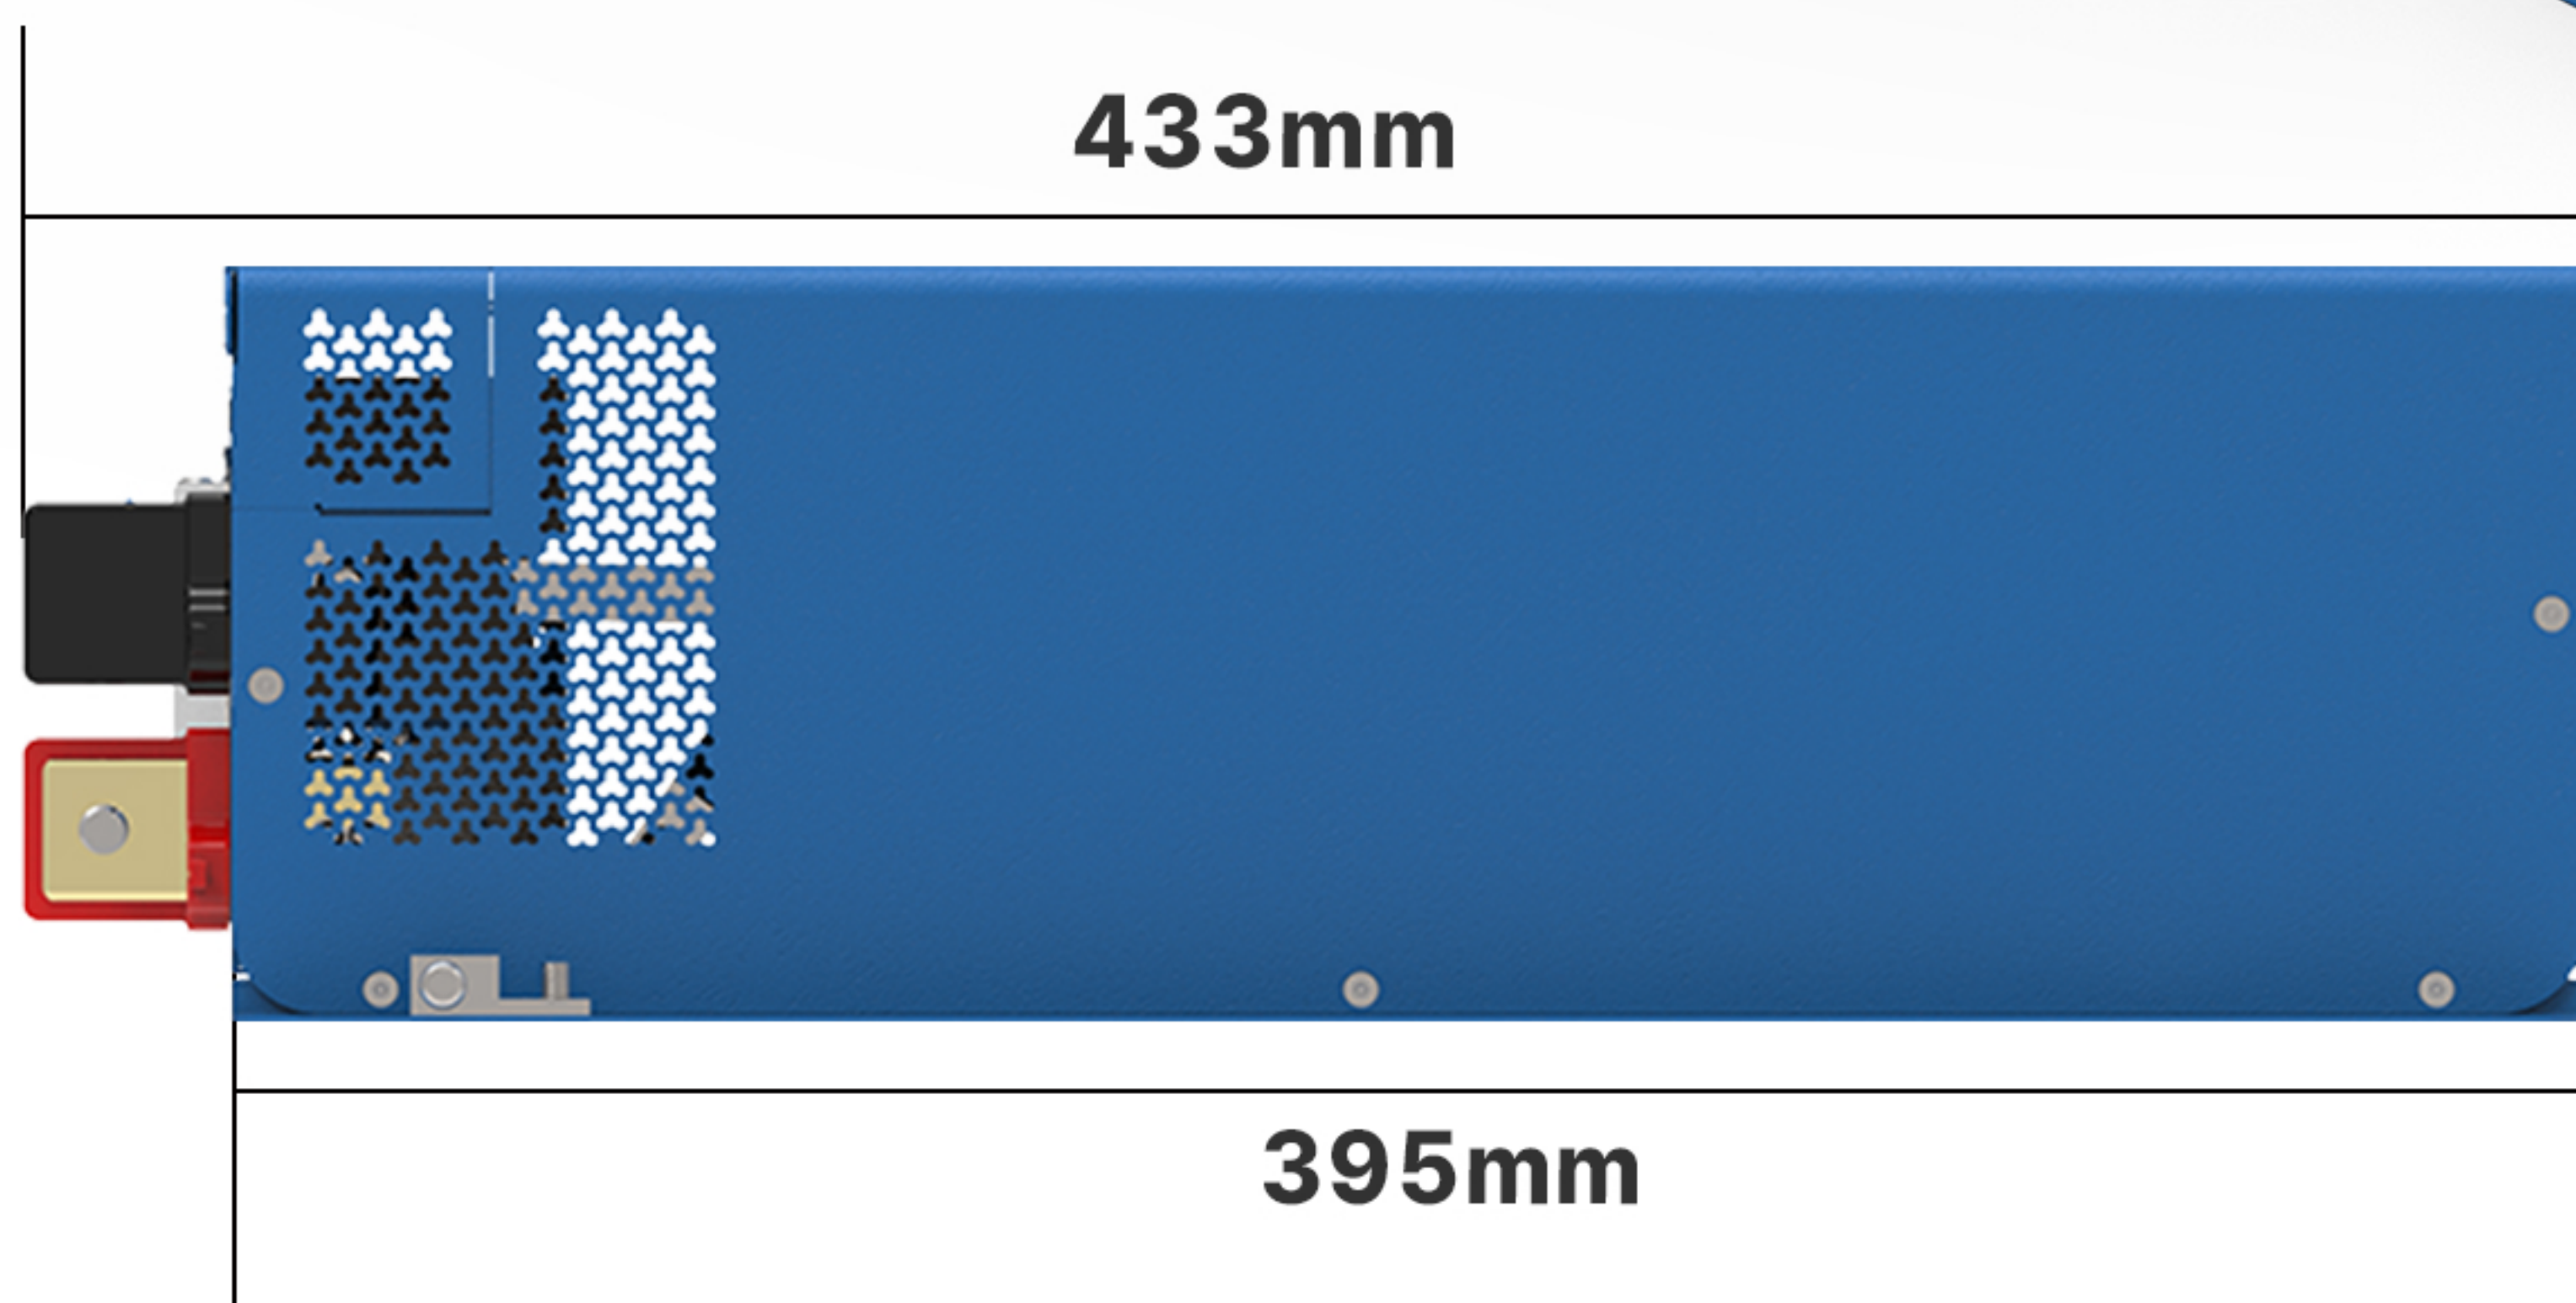

**Width : 347mm**  
without Bracket : 305.5mm

**Length : 433mm**  
without Terminal : 395mm

**Height : 127mm**  
without Bracket : 118mm

**Weight : About 10kg**