



Specification

* Labels and some designs may vary depending on the manufacturing period.




Model	SITE POWER 3K 24V 125A
Battery Rated Voltage	25.6V
Battery Rated Capacity	125Ah/3200Wh
Battery Charging Voltage	29.2V
Battery Recommended Charge/Discharge Current	25A(0.2C)/25A(0.2C)
Battery Max. Charge/Discharge Current	62A(0.5C)/125A(1.0C)
Battery Safety Protection	Built-in BMS with Overvoltage, Overcurrent etc.
Inverter DC Input Voltage	24V
Inverter Continuous/Peak Power	3000W/6000W
Inverter AC Output Power	Selectable voltage:100/110/120/220/230/240V
Inverter DC Voltage Range	20V~31.5V
Inverter Output Wave Form/Efficiency	Pure Sine Wave/Up to 91%
Operating Temperature	-20 to 60°C
Weight	About 46 ± 1kg
Size	701.5 X 410 X 460.5mm

SITE POWER 3K

24V 125A STEEL



Dimension

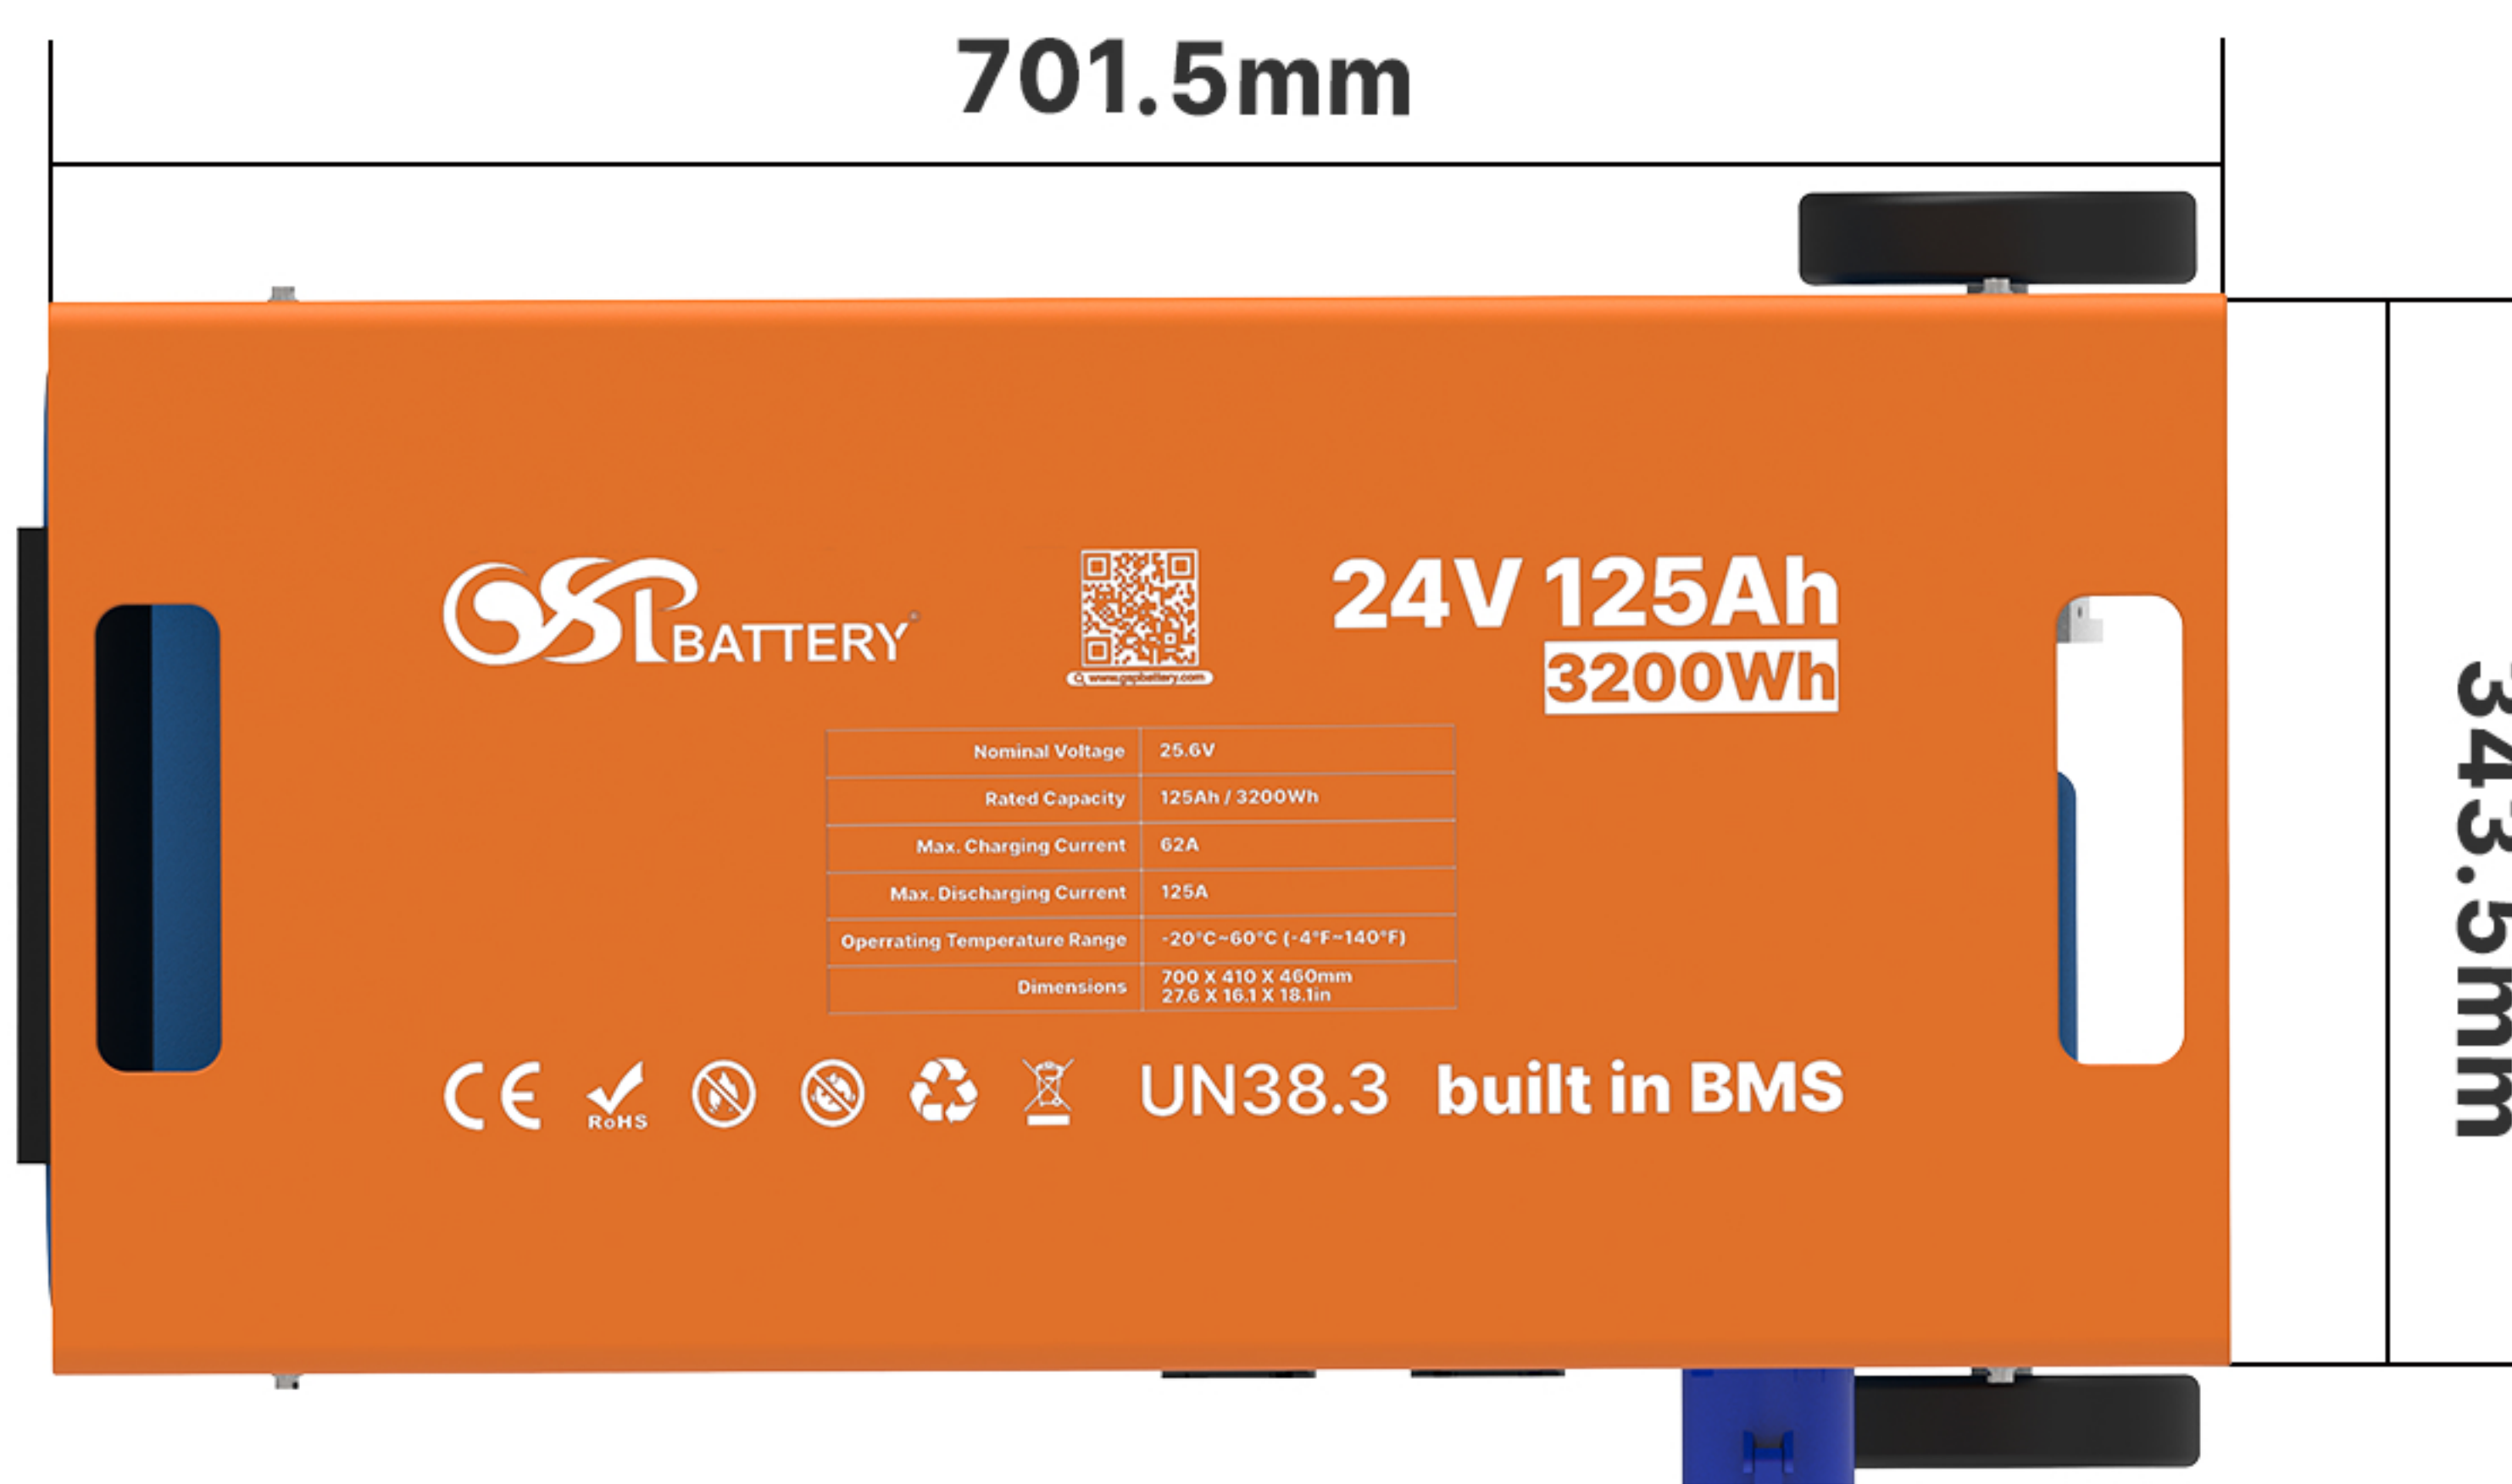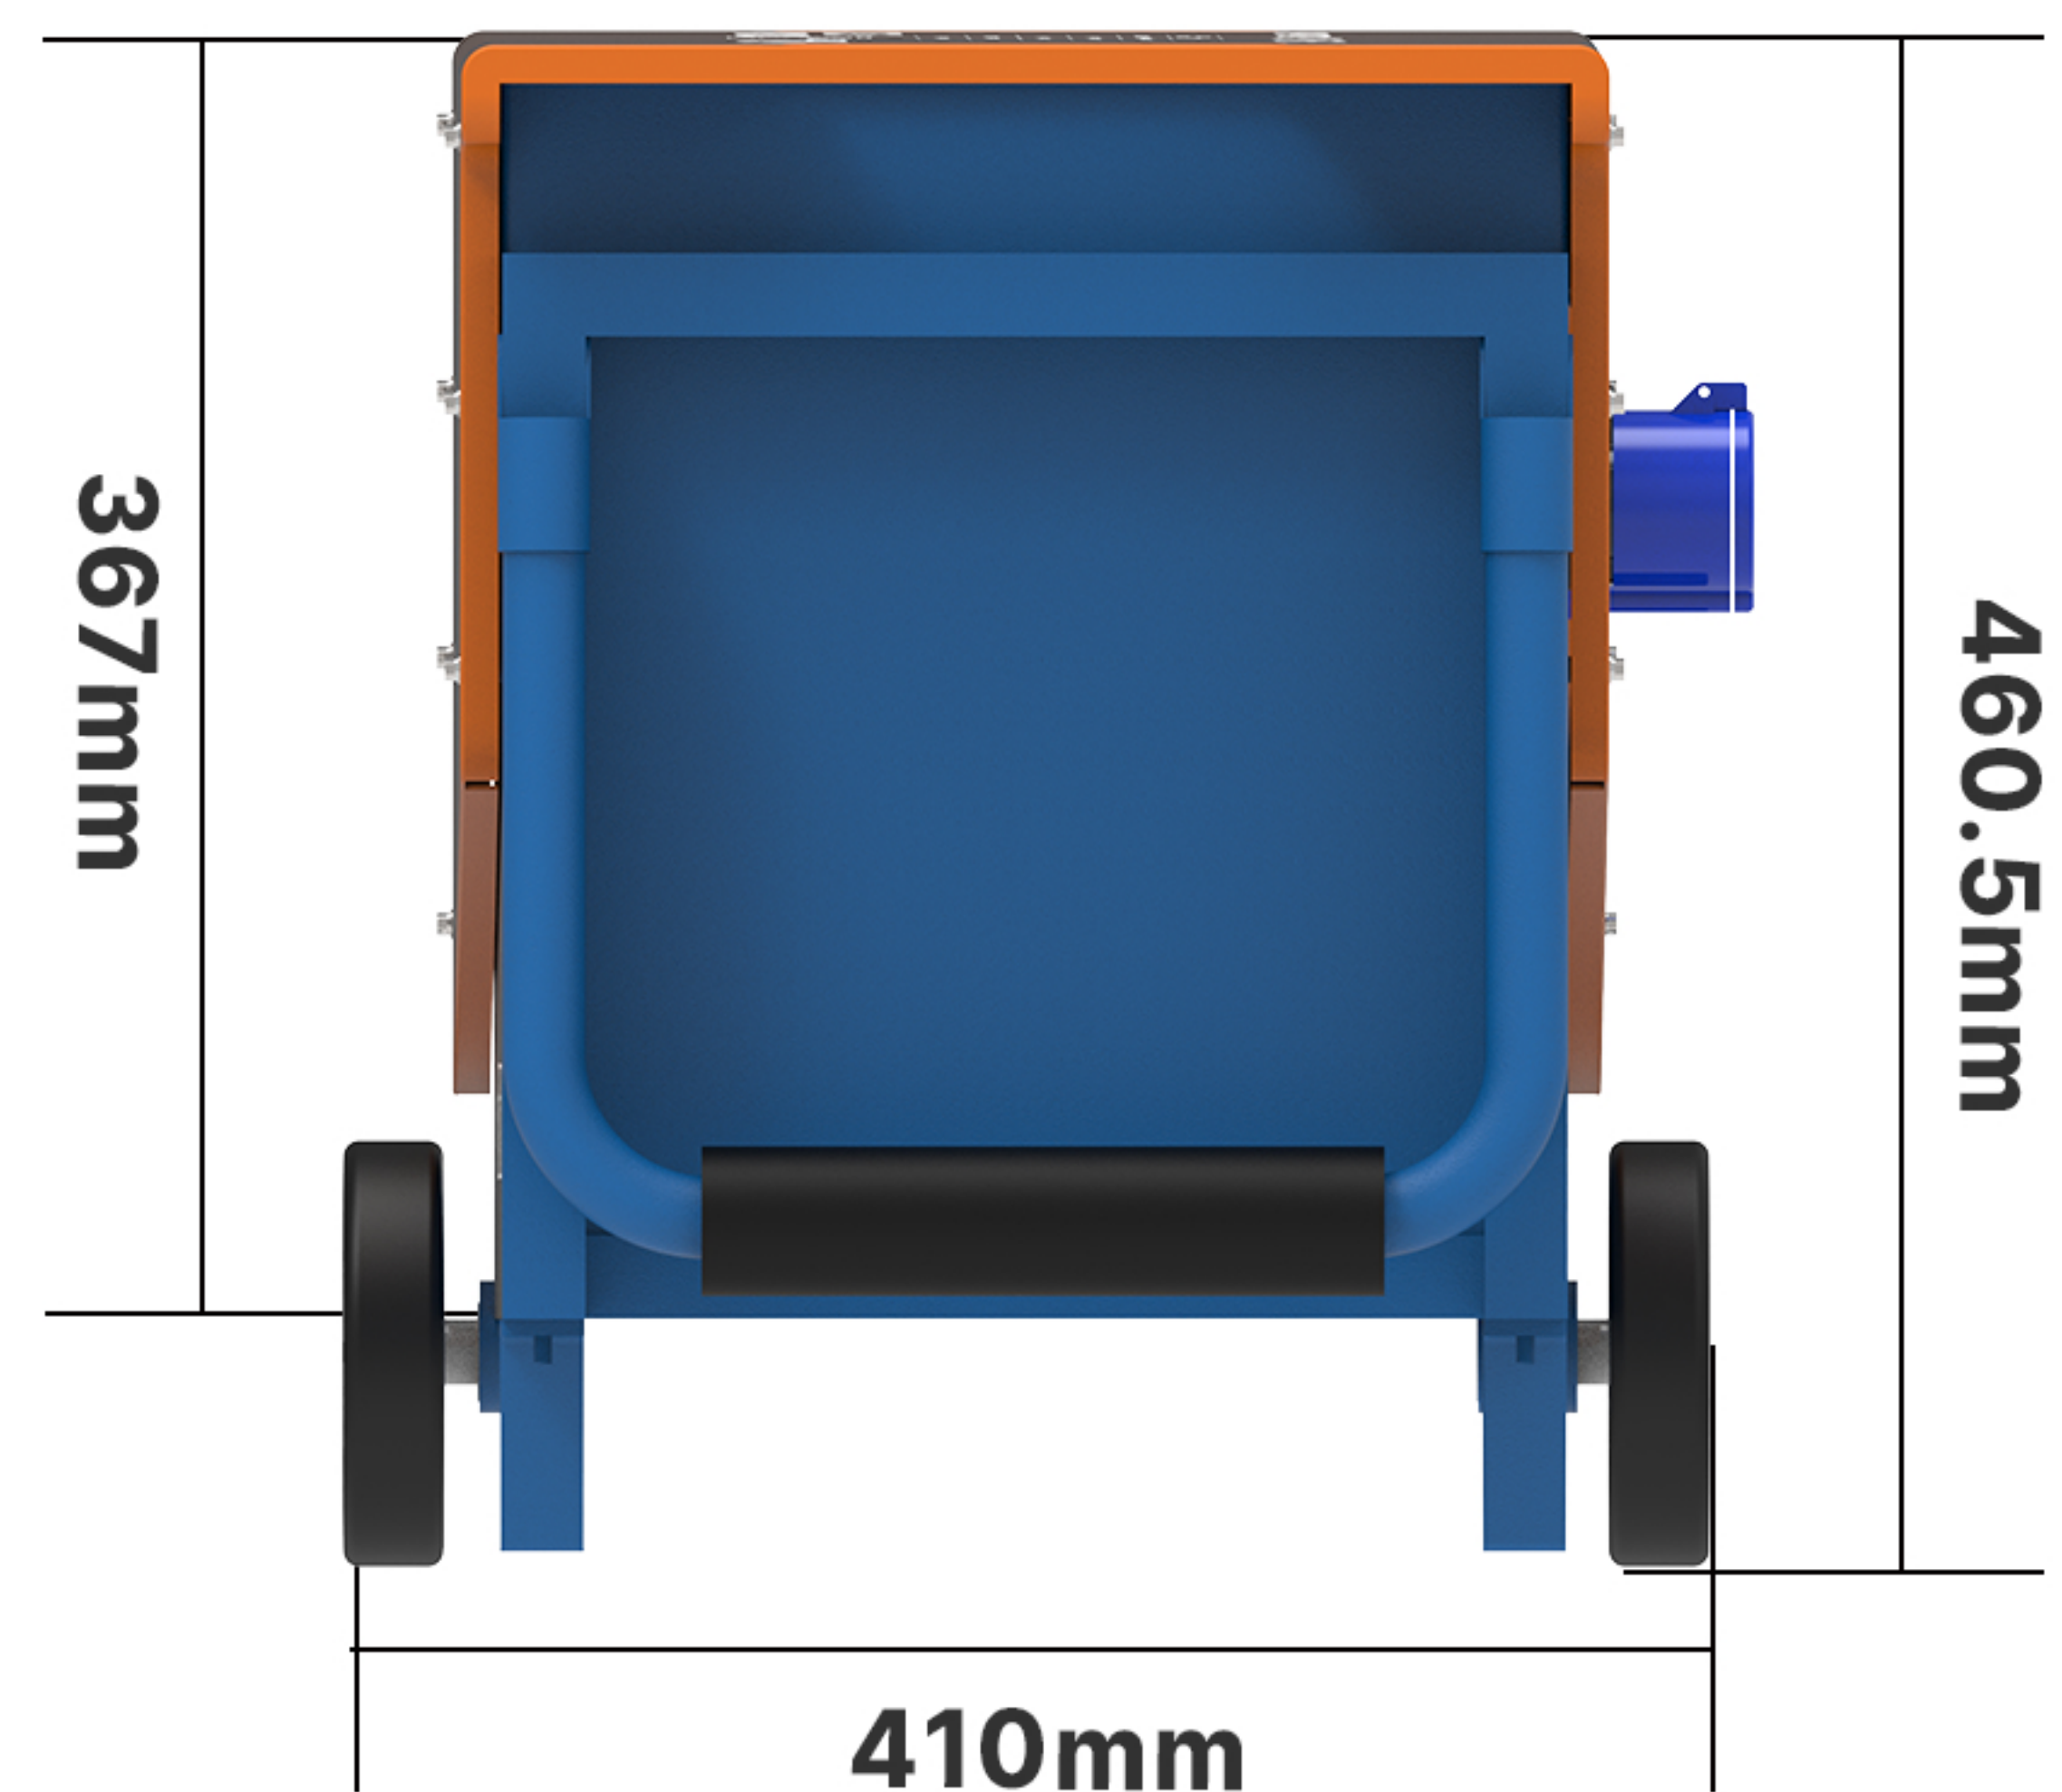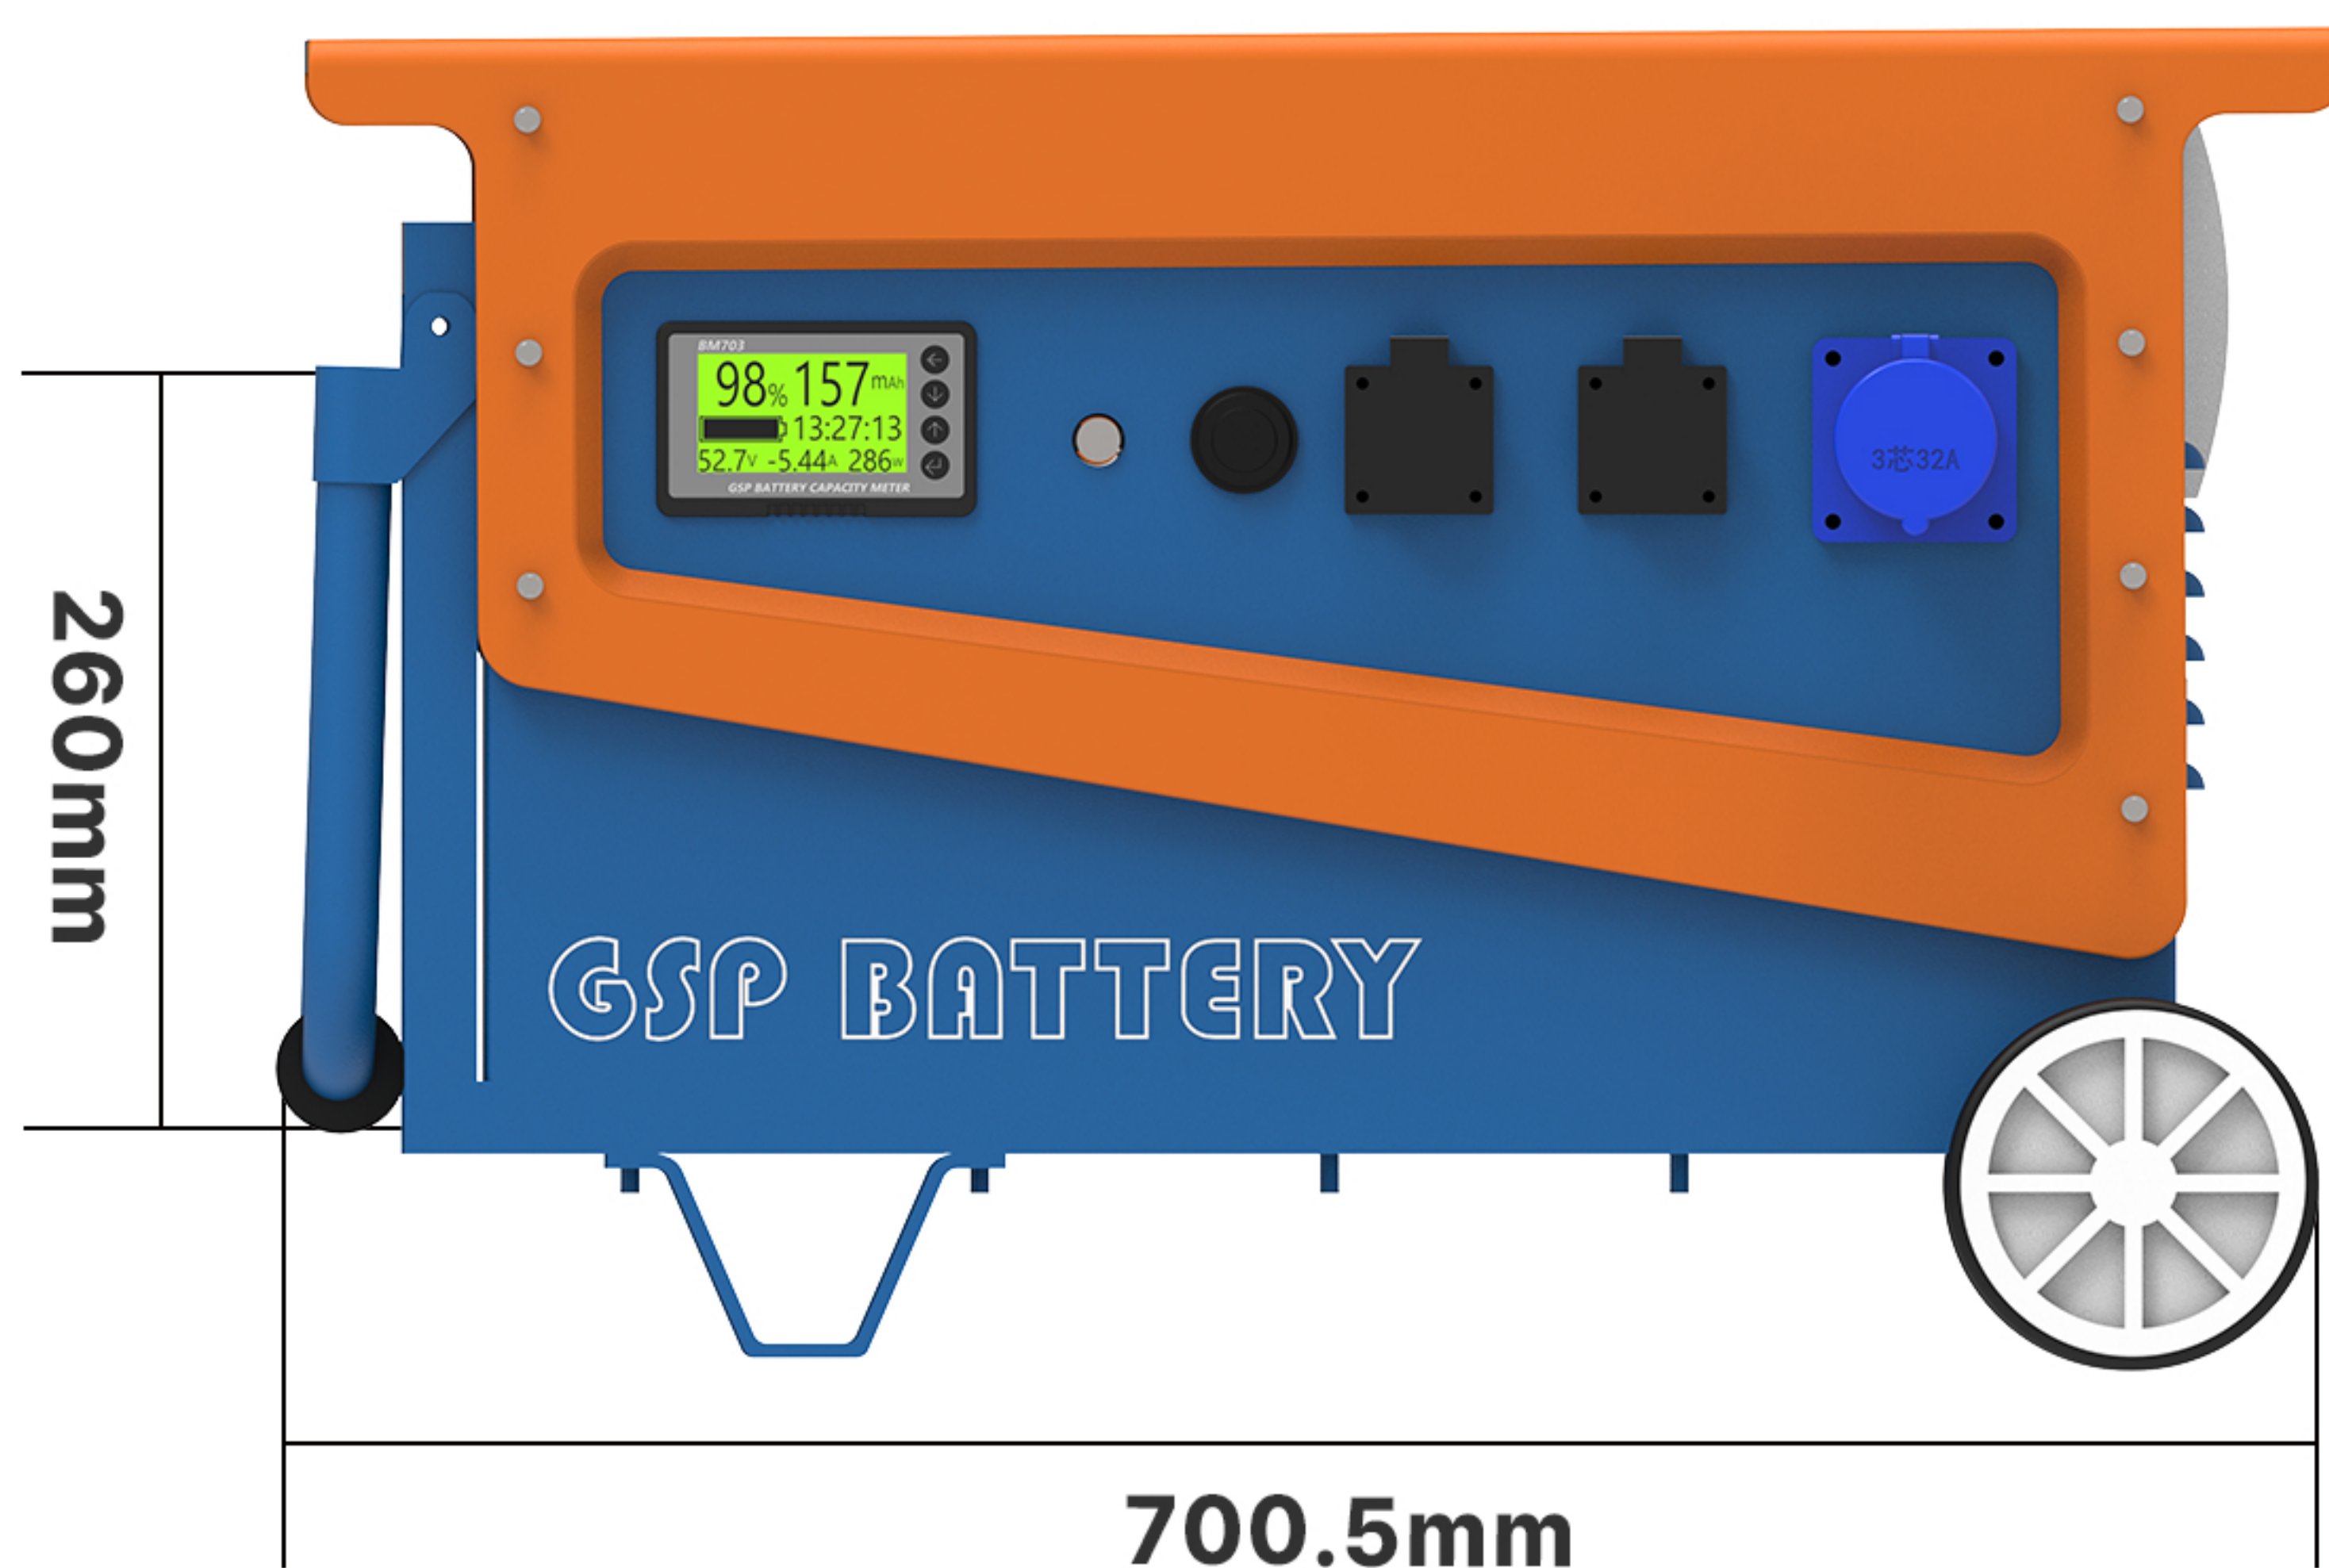

Width : 701.5mm

Length : 410mm

Height : 460.5mm

Weight : About 46 ± 1kg

* Excludes cable and connector weight; cable length can be adjusted upon request.